

# BRAVO

## CLASSIC MODELS

### Features



- Wall and ceiling mounting
- Low noise impeller
- Easy maintenance
- Continuous operation
- Backdraft damper
- Ball bearing motor
- Available in chrome (Bravo Chrome) and platinum (Bravo Platinum) decorations
- 5 year warranty



**Air flow:**  
up to 305 m<sup>3</sup>/h  
85 l/s



**Power:**  
from 14 W

**SFP:**  
from 0.28 W/l/s



**Noise level:**  
from 35 dBA



Chrome

Platinum


### Options




Model	Bravo 100/125/150					
Option	S	T	ST	H	SH	IR
Pull-cord switch	•		•		•	
Timer		•	•	•	•	
Humidity sensor				•	•	
Motion sensor						•

- Turn-off delay adjustable from 2 to 30 min.
- Humidity setpoint adjustable from 60 % up to 90 %.
- Detection range from 1 up to 4 m.
- Detection angle up to 100°.

### Overall dimensions and mounting

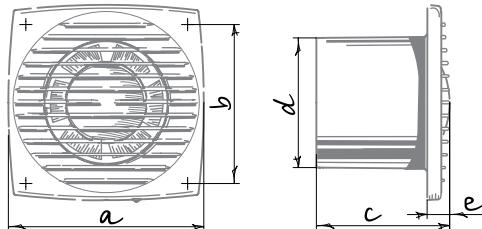

Dimensions [mm]	a	b	c	Ø d	e
Bravo 100	150	122	102	100	17
Bravo 125	176	144	104	125	17
Bravo 150	205	174	124	150	19



### Designation key

Bravo	Chrome	100	S	(127-220V/60Hz)
Model	Color	Spigot diameter	Option	Voltage

### Accessories

Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps



BlauPlast

BlauFlex

Decor, GM

CDT E1.8

MCD 60/0.3

K, KZ