

**MV 102
MV 122
MV 152
Series**




Application

- Decoration of supply and exhaust vents of public, residential and industrial ventilation systems.
- External wall mounting.

Design

- Made of quality and durable plastic.
- Two-element structure for easy maintenance.
- Screw fixing.
- Equipped with a protecting grille against birds and rodents.

Colour modifications



Modifications

MV 102, MV 122 - basic modifications



- Supply and exhaust hoods for wall mounting.
- Screw fixing.



MV 102 V, MV 122 V, MV 152 V - models with a round flange




- Supply and exhaust hoods for wall mounting.
- Equipped with a round connecting flange for mounting to Ø 100 mm (MV 102 V), Ø 125 mm (MV 122 V), Ø 150 mm (MV 152 V) air ducts.



MV 102 VU - model with a multi-section flange (VU)




- Supply and exhaust hood for wall mounting.
- Equipped with a connecting flange for mounting to Ø 100, 125 or 55x110 mm air ducts.



MV 122 VN - model with a flange with various diameters




- Supply and exhaust hood for wall mounting.
- Equipped with a round connecting flange with various diameters for mounting to Ø 100/110/120/130/150 mm air ducts.



MV 102 K and MV 122 K - models with a backdraft damper




- Exhaust hoods for wall mounting.
- Fitted with a gravity backdraft damper for back flow prevention.



MV 102 VK, MV 122 VK, MV 152 VK - models with a round flange and a backdraft damper




- Exhaust hoods for wall mounting.
- Fitted with a gravity backdraft damper for back flow prevention.
- Equipped with a round connecting flange for mounting with Ø 100 mm (MV 102 VK), Ø 125 mm (MV 122 VK), Ø 150 mm (MV 152 VK) air ducts.



MV 102 VUK - model with a multi-section flange (VU)




- Exhaust hood for wall mounting.
- Fitted with a gravity backdraft damper for back flow prevention.
- Equipped with a multi-section flange for mounting with Ø 100, 125 mm or 55x110 mm air duct.



MV 122 VNK - model with a flange with various diameters (VN)



- Exhaust hood for wall mounting.
- Equipped with a round connecting flange with various diameters for mounting with Ø 100/110/120/130/150 mm air ducts.
- Fitted with a gravity backdraft damper for back flow prevention.



Overall dimensions

Model	Dimensions, [mm]						Air pass, [m ²]	Fig. no.
	□B	□H	L	L1	L2	Flange (D)		
MV 102 / MV 102 K	154	110	15	—	87	—	0,008	1
MV 102 V / MV 102 VK	154	110	15	45	87	100	0,008	1, 2
MV 102 VU / MV 102 VUK	154	110	15	39	87	100, 125, 55*110	0,008	1, 3
MV 122 / MV 122 K	186	142	15	—	101	—	0,012	1
MV 122 V / MV 122 VK	186	142	15	45	101	125	0,012	1, 2
MV 122 VN / MV 122 VNK	186	142	15	115	101	100, 110, 120, 130, 150	0,012	1, 4
MV 152 V / MV 152 VK	186	142	15	50	101	150	0,012	1, 2




Fig. 1




Fig. 2




Fig. 3

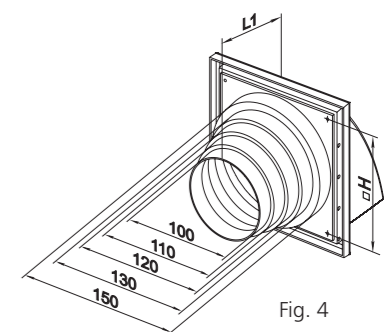


Fig. 4